COR VISION PLUS SLIDING SYSTEM

TBB

ENERGY EFFICIENCY

Thermal Transmission Coefficient
Uw ≥ 0.9 (W/m²K)
Please consult typology, dimensions and glazing

ACCOUSTIC INSULATION

Maximum glazing: **56 mm**
Maximum accoustic insulation: **Rw = 43 dB**

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (EN 12207):	**Class 4**
Water tightness (EN 12208):	**Class 7A* / 9A***
Wind resistance (EN 12210):	**Class C3* / C4****

* Reference test balcony 4.00 x 3.00 m / 2 sashes
** Reference test balcony 4.00 x 3.00 m / 1 sash + 1 fixed light

SECTIONS	Frame 180 mm / 278 mm 3 Rails Sash 69 mm
PROFILE THICKNESS	Door 2.0 mm
MAXIMUM DIMENSIONS	Width (L) = 4.000 mm Height (H) = 4.000 mm *Glazed surface 14 m
MAXIMUM WEIGHT/SASH	400 kg Manual 700 Kg Motorized

Please consult regarding maximum weight and dimensions according to types

EXTRUSION ALLOY

6063 T-5

POLYAMIDE STRIP LENGTH

Frame 40 mm
Sash 18 / 32 mm


OPENING POSSIBILITIES

Sliding
1, 2, 3, and 4 sashes
Possibility of interior and exterior corner sash at 90º without mullion
Galandage

FINISHES

Colour powder coating
(RAL, mottled, rough...)
According to Qualicoat >60 micras
Wood effect powder coating
According to Qualideco standard

Anodized
According to Ewwa Euras
Standard Class 15
Optionally Class 20 and 25
Optionally bicoloured

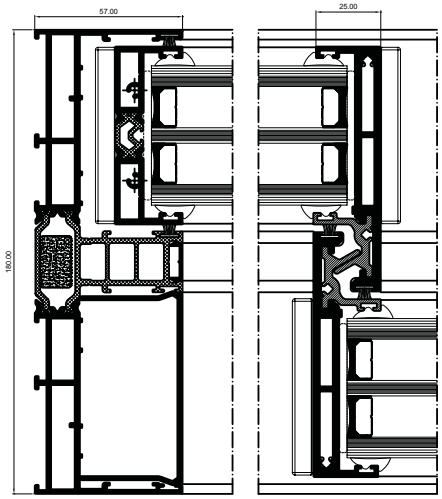

NBS Source PARTNER