



SG 52 FACADE

This SG 52 façade is a traditional system, also known as the Stick system. **The fixing of the glazing to the supporting profiles is carried out by using clips. This system requires an insert that is fitted in to the glazing chamber (U profile).** The combination of the clip and the insert allows the glass to be fastened on all four sides.

The large Thermal Break, combined with its ample glazing capacity of up to 50 mm with glass compositions of large thicknesses and energy efficiency, presents to this new range of facades excellent thermal and acoustic performance features.

It has a “glass only” style on the exterior.



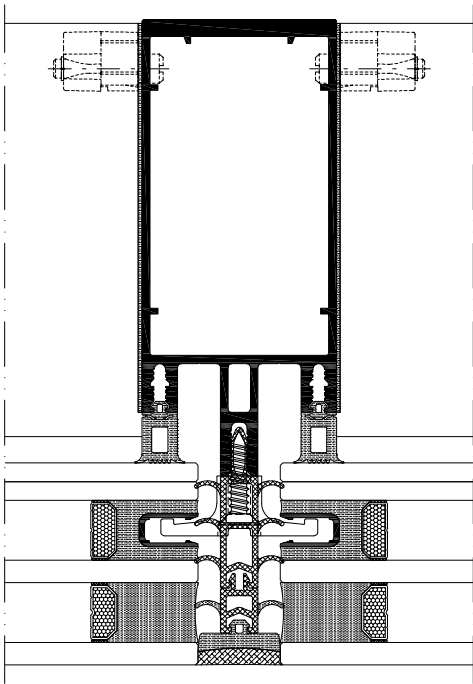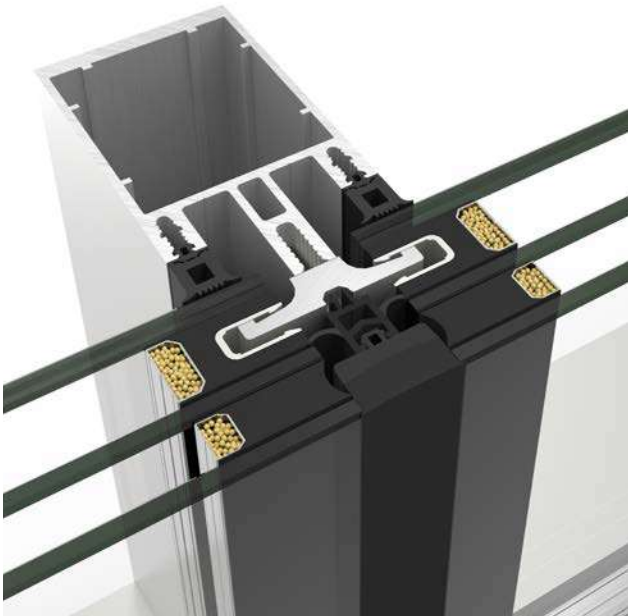

TRANSMITTANCE

U_{CW} from **0.6 (W/m²K)**

Consult dimensions and glass.

GLAZING

Maximum glazing: **64 mm**

Minimum glazing: **6 mm**

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents.

Air permeability (EN 12152:2000): **Class AE**

Water tightness (EN 12154:2000): **Class RE₁₅₀₀**

Wind resistance (EN 13116:2001): **APT**

(Design loading 2000 Pa - Security loading 3000 Pa)

Test reference 3.00 x 3.50 m.

SECTIONS

Mullion 52 mm
Transom 52 mm

PROFILE THICKNESS

Mullion 2.1 & 3.0 mm
Transom 2.1 mm

THERMAL BREAKING

Thermally broken
profiles in 6, 12 & 30
mm stackables.

MAXIMUM WEIGHT

180 Kg

MAXIMUM / LOW DIMENSIONS

Max. Width (L) = 2,500 mm
Max. Height (H) = 2,500 mm

Min. Width (L) = 500 mm
Min. Height (H) = 650 mm

Hidden projecting opening.

OPENING POSSIBILITIES

Hidden projecting opening.



CWCT British Standard.